

NAN YA PLASTICS CORP.
ELEC. MATERIALS DIV.
LCD DEPARTMENT

SPECIFICATION

SPEC. NO. : LM071-0
DATE : Apr. 15, 1996
SHEET NO. : 1/16

U.S. MARKETING ARM:

MARK PRODUCTS CORPORATION
800 N. EDGEWOOD AVENUE
WOOD DALE, IL 60191
TEL: 630-787-9089
FAX: 630-787-9015

SPECIFICATION OF
16x2 LCD MODULE
PRODUCT NO.: LM_83_071__E_

SPEC. NO.: LM071-0

APPROVED BY

EDITED ON : Apr. 15, 1996


| TECHNICAL MANAGER | DESIGN MANAGER | PERSON IN CHARGE |
|----------------------|-------------------|---------------------|
| | | |

| | | | | | | | | |
|----------|------------------|--|--|--|--|-----|-----|----|
| REV/DATE | R0/ 04.15.96' | | | | | APP | CHK | BY |
|----------|------------------|--|--|--|--|-----|-----|----|

1. MECHANICAL DATA

- (1) Product No. LM_83_071_4E_
- (2) Module Size 80.0 (W)mm x 36.0 (H)mm x MAX14.5 (D)mm (LED B.L.)
80.0 (W)mm x 36.0 (H)mm x MAX12.5 (D)mm (EDGE LED B.L.)
80.0 (W)mm x 36.0 (H)mm x MAX9.5 (D)mm (W/O,EL B.L.)
- (3) Dot Size 0.55 (W)mm x 0.5 (H)mm
- (4) Dot Pitch 0.6 (W)mm x 0.55 (H)mm
- (5) Number of Characters 16 (W) x 2 (H)Characters
- (6) Character Format 5 (W) x 8 (H)Dots
- (7) Duty 1/16
- (8) LCD Display Mode STN: Gray Mode Yellow Mode Blue Mode
FSTN: Black and White(Normally White/Positive Image)
 Black and White(Normally Black/Negative Image)
Rear Polarizer: Reflective Transflective Transmissive
- (9) Viewing Direction 6 O'clock 12 O'clock ___O'clock
- (10) Backlight W/O LED EDGE LED EL
- (11) Weight W/O B/L: 28 g
EL B/L: 30 g
LED B/L: 40 g
EDGE LED B/L: 35 g

Note :

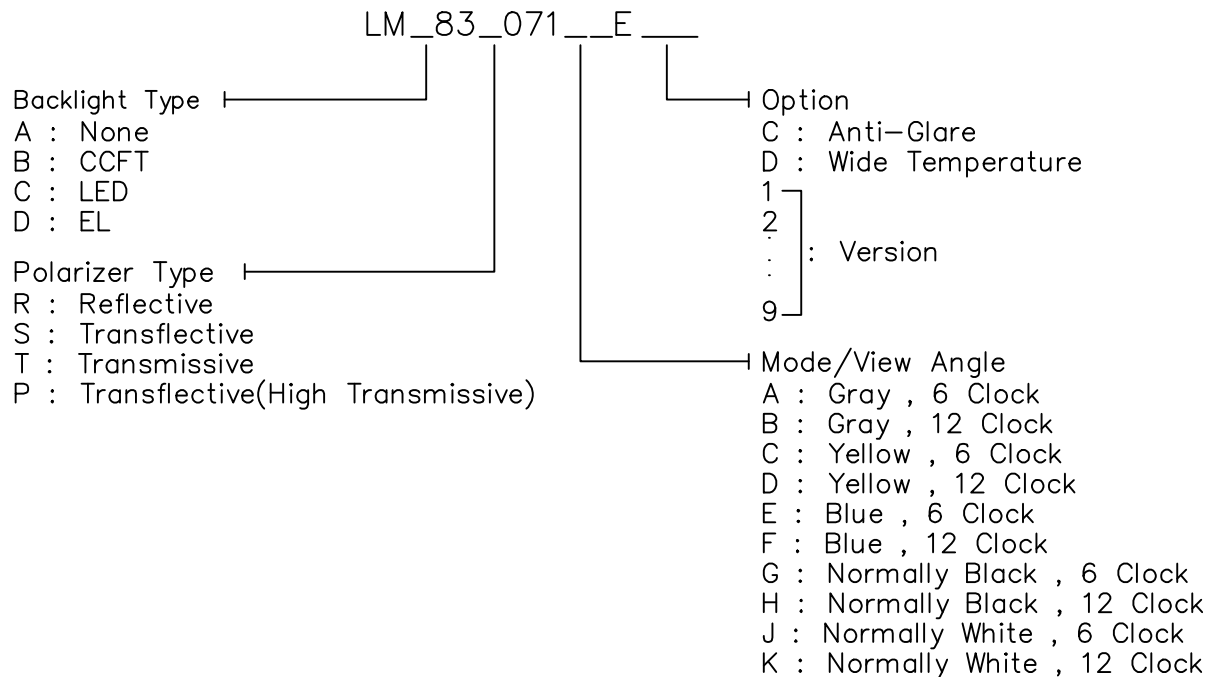

2. ABSOLUTE MAXIMUM RATINGS

(1) ELECTRICAL ABSOLUTE RATINGS

VSS=0V

| | SYMBOL | MIN | MAX | UNIT | COMMENT |
|------------------------|---------|------|-----|------|---------|
| Power Supply for Logic | VDD-VSS | -0.3 | 6.5 | V | |
| Input Voltage | VI | -0.3 | VDD | V | |
| Static Electricity | - | - | - | - | Note 1 |

Note 1 LCM should be grounded during handling LCM.

(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

| ITEM | NORMAL TEMP. | | | | WIDE TEMP. | | | |
|---------------------------------|--------------|------|----------|------|------------|------|----------|------|
| | OPERATING | | STORAGE | | OPERATING | | STORAGE | |
| | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. |
| Ambient Temperature | 0 | 50 | -20 | 70 | -20 | 70 | -30 | 80 |
| Humidity (Without Condensation) | Note 1,3 | | Note 2,3 | | Note 3,4 | | Note 3,5 | |

Note 1 Ta \leq 50°C : 85%RH max
Ta > 50°C : Absolute humidity must be lower
than the humidity of 85%RH at 50°C

Note 2 Ta at -20°C will be < 48hrs, at 70°C will be < 120hrs

Note 3 Background color changes slightly depending on ambient temperature.
This phenomenon is reversible.

Note 4 Ta \leq 70°C : 75%RH max
Ta > 70°C : Absolute humidity must be lower
than the humidity of 75%RH at 70°C

Note 5 Ta at -30°C will be < 48hrs, at 80°C will be < 120hrs

| | | | | | | | | |
|----------|------------------|--|--|--|--|-----|-----|----|
| REV/DATE | R0/ 04.15.96' | | | | | APP | CHK | BY |
|----------|------------------|--|--|--|--|-----|-----|----|

3. ELECTRICAL CHARACTERISTICS

(VDD=5V±10%)

| ITEM | SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT |
|---|--------------------|--|--------|------|--------|------|
| Input Voltage | V _{IH} | H level | 0.8VDD | - | VDD | V |
| | V _{IO} | L level | 0 | - | 0.2VDD | V |
| Recommended LC Driving Voltage (NORMAL TEMP. LCM) | VDD-V _O | 0°C | - | 4.8 | 5.4 | V |
| | | 25°C | 4.2 | 4.6 | 5.1 | |
| | | 50°C | 3.9 | 4.3 | - | |
| Recommended LC Driving Voltage (WIDE TEMP. LCM) | VDD-V _O | -20°C | - | 6.4 | 7.2 | V |
| | | 0°C | - | 6.4 | - | |
| | | 25°C | - | 6.1 | - | |
| | | 50°C | - | 5.9 | - | |
| | | 70°C | 5.2 | 5.5 | - | |
| Power Supply Current | I _{DD} | VDD-V _O =4.6V | - | 1.0 | - | mA |
| LED Power Supply Current | I _{LED} | V _{BL} = 5V _{DC} (R _{BL} = 5Ω) | - | 200 | - | mA |
| EL Power Supply Current | I _{EL} | V _{BL} = 110V _{AC} 400Hz | - | - | 5.0 | mA |

4. OPTICAL CHARACTERISTICS

(FOR NORMAL TEMPERATURE MODE LCM)

AT Vop

| MODE | ITEM | Cr(Contrast Ratio) | | θ (Viewing Angle) | | ϕ (Viewing Angle) | |
|------|------|--------------------|------|--------------------------|------|------------------------|------|
| | | 25°C | | 25°C | | 25°C | |
| | | MIN. | TYP. | MIN. | TYP. | MIN. | TYP. |
| R | A | - | 5 | 40 | - | 30 | - |
| | C | | | | | | |
| | J | | | | | | |
| S | A | | | | | | |
| | C | | | | | | |
| | J | | | | | | |
| T | C | 4 | 8 | 40 | - | 30 | - |
| | E | | | | | | |
| NOTE | | NOTE6 | | NOTE5 | | | |

AT $\phi=0^\circ$ $\theta=0^\circ$

| ITEM | SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT | NOTE |
|----------------------|--------|-----------|------|------|------|------|--------|
| Response Time (rise) | Tr | 0°C | - | 460 | 900 | ms | NOTE 2 |
| | | 25°C | - | 100 | 250 | | |
| | | 50°C | - | 65 | - | | |
| Response Time (fall) | Tf | 0°C | - | 420 | 800 | ms | NOTE 2 |
| | | 25°C | - | 150 | 300 | | |
| | | 50°C | - | 90 | - | | |

NOTE :

R: REFLECTIVE
S: TRANSFLECTIVE
T: TRANSMISSIVE
A: GRAY
C: YELLOW
E: BLUE
G: NORMALLY BLACK
J: NORMALLY WHITE

4-1.OPTICAL CHARACTERISTICS

(FOR WIDE TEMPERATURE MODE LCM)

AT Vop

| MODE | ITEM | Cr(Contrast Ratio) | | θ (Viewing Angle) | | ϕ (Viewing Angle) | |
|------|------|--------------------|------|--------------------------|------|------------------------|------|
| | | 25℃ | | 25℃ | | 25℃ | |
| | | MIN. | TYP. | MIN. | TYP. | MIN. | TYP. |
| R | A | - | 4.5 | 50 | 70 | 25 | 30 |
| | C | | | | | | |
| | J | | | | | | |
| S | A | - | 3.7 | 40 | 60 | 25 | 34 |
| | C | | | | | | |
| | J | | | | | | |
| T | E | | | | | | |
| | G | | | | | | |
| NOTE | | NOTE6 | | NOTE5 | | | |

AT $\phi=0^\circ$ $\theta=0^\circ$

| ITEM | SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT | NOTE |
|----------------------|--------|-----------|------|------|------|------|--------|
| Response Time (rise) | Tr | -20℃ | - | 1530 | 3000 | ms | NOTE 2 |
| | | 0℃ | - | 270 | 540 | | |
| | | 25℃ | - | 130 | 260 | | |
| | | 50℃ | - | 70 | 140 | | |
| | | 70℃ | - | 65 | 130 | | |
| Response Time (fall) | Tr | -20℃ | - | 1490 | 3000 | ms | NOTE 2 |
| | | 0℃ | - | 310 | 600 | | |
| | | 25℃ | - | 90 | 180 | | |
| | | 50℃ | - | 48 | 100 | | |
| | | 70℃ | - | 40 | 80 | | |

NOTE :


R: REFLECTIVE
S: TRANSFLECTIVE
T: TRANSMISSIVE
A: GRAY

C: YELLOW
E: BLUE
G: NORMALLY BLACK
J: NORMALLY WHITE


| | | | | | | | | |
|----------|------------------|--|--|--|--|-----|-----|----|
| REV/DATE | R0/ 04.15.96' | | | | | APP | CHK | BY |
|----------|------------------|--|--|--|--|-----|-----|----|

(NOTE 1)

Definition of Operation Voltage(Vop)

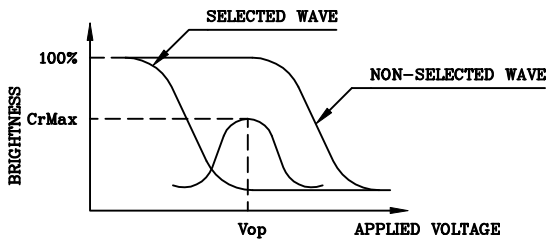

(positive type)

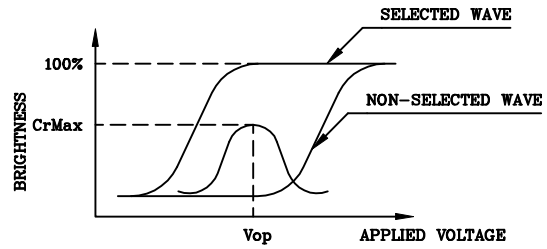


(negative type)

*Conditions


Viewing Angle : 0
 Frame Frequency : 70Hz
 Applied Waveform : 1/N duty, 1/a bias

(NOTE 2)

Definition of Response Time(Tr,Tf)

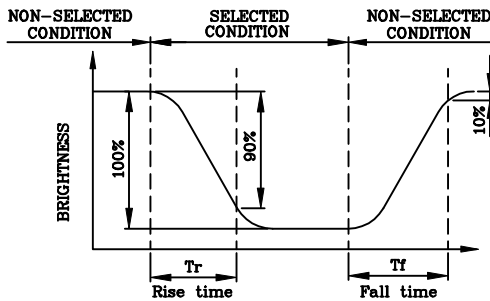

(positive type)

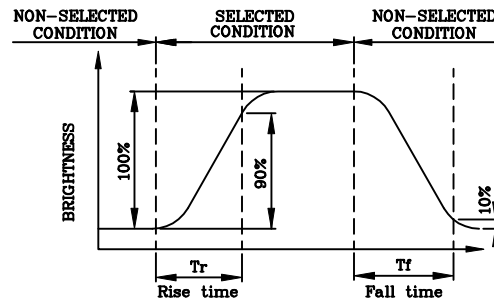



(negative type)

*Conditions

Operating Voltage : Vop
 Viewing Angle (θ,φ) : (0,0)
 Frame Frequency : 70Hz
 Applied Waveform : 1/N duty, 1/a bias


(NOTE 3)

Description of Measuring Equipment and Driving Waveforms

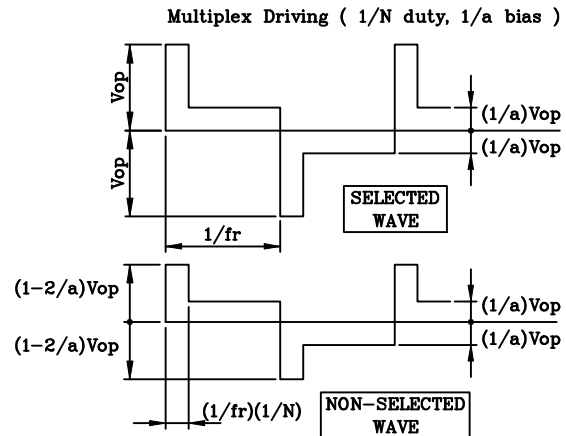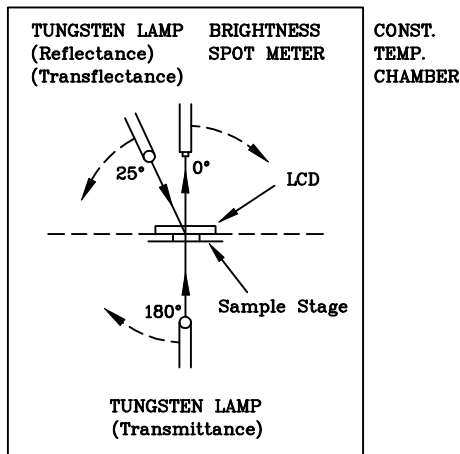


(NOTE 4)

Definition of Viewing Direction

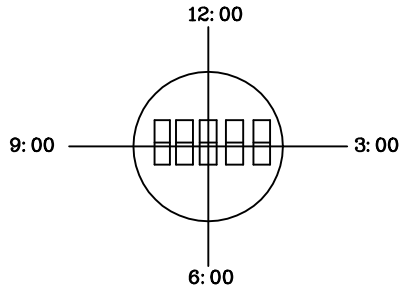

(NOTE 5)

Definition of Viewing Angle

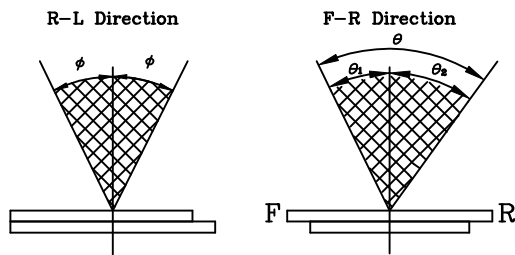


$\theta = \theta_1 + \theta_2$

*Conditions


- Operating Voltage : V_{op}
- Frame Frequency : 70Hz
- Applied Waveform : 1/N duty, 1/a bias
- Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

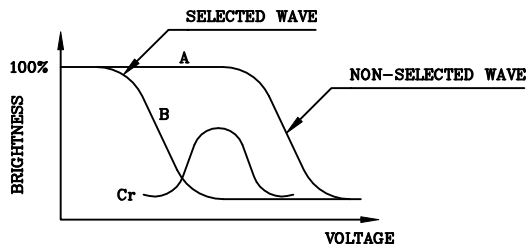

(positive type)

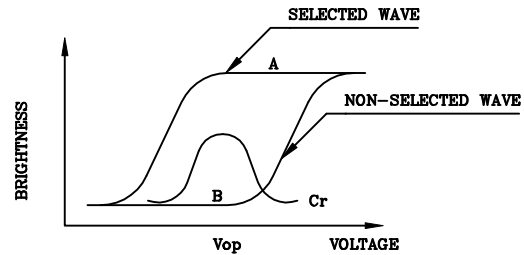


(negative type)

Contrast Ratio : $Cr = A/B$

*Conditions

- Viewing Angle : 0
- Frame Frequency : 70Hz
- Applied Waveform : 1/N duty, 1/a bias


5. BLOCK DIAGRAM

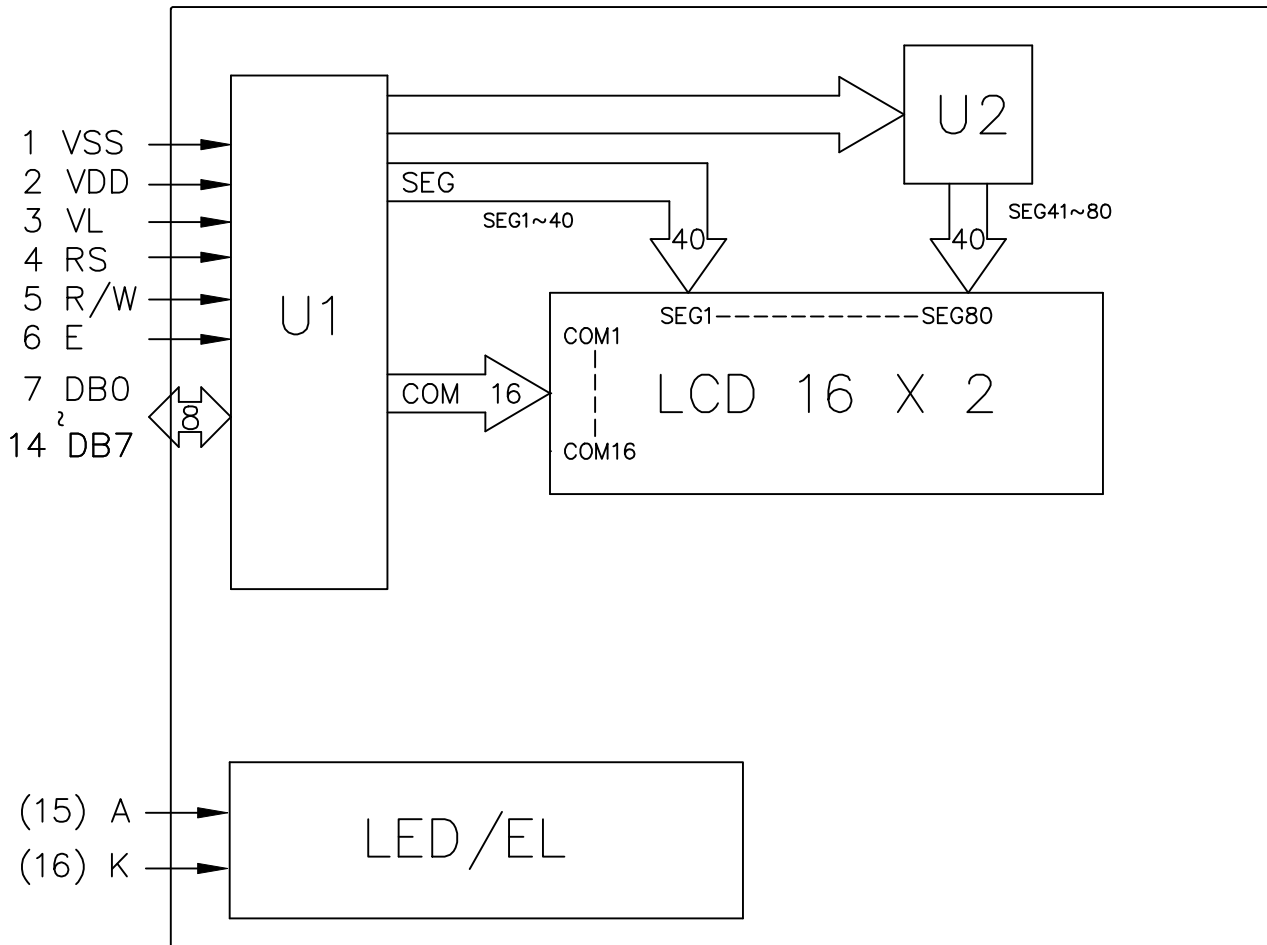

6. INTERNAL PIN CONNECTION

| PinNo. | Symbol | Level | Function | |
|--------|--------|---------|---|-----------------|
| 1 | VSS | — | 0V | POWER SUPPLY |
| 2 | VDD | — | +5V | |
| 3 | VL | — | — | |
| 4 | RS | H/L | L: INSTRUCTION CODE INPUT H: DATA INPUT | |
| 5 | R/W | H/L | H: DATA READ (FROM LCM TO MPU) L: DATA WRITE (FROM MPU TO LCM) | |
| 6 | E | H, H->L | ENABLE SIGNAL | |
| 7 | DB0 | H/L | DATA BUS LINE | |
| 8 | DB1 | H/L | | |
| 9 | DB2 | H/L | | |
| 10 | DB3 | H/L | | |
| 11 | DB4 | H/L | | |
| 12 | DB5 | H/L | | |
| 13 | DB6 | H/L | | |
| 14 | DB7 | H/L | POWER SUPPLY FOR LED/EL | |
| (15) | A | — | | |
| (16) | K | — | | |

7. POWER SUPPLY

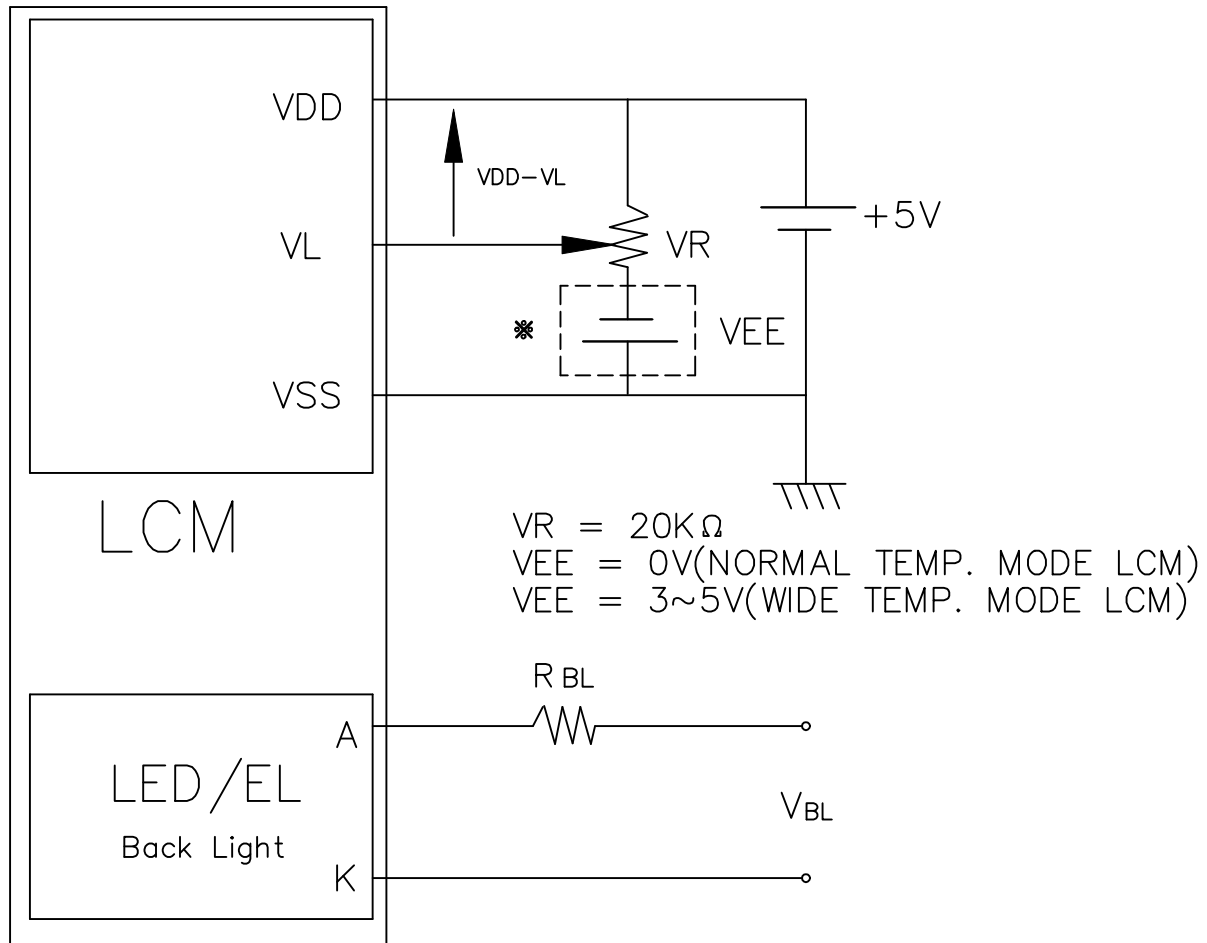

Recommended Value for R_{BL} and V_{BL}

| ITEM Back Light Interface | R_{BL} | | V_{BL} | |
|------------------------------------|------------|------------|------------------|------------------------------|
| | LED | EL | LED | EL |
| 14 PIN | 5 Ω | 0 Ω | 5V _{DC} | 110 V _{AC} 400Hz |
| 16 PIN | 0 Ω | | | |

8. TIMING CHARACTERISTICS

| Item | Symbol | Test Condition | Min. | Typ. | Max. | Unit |
|------------------------|------------------|----------------|------|------|------|------|
| Enable cycle time | t_{cyc} | Fig.a, Fig.b | 500 | - | - | ns |
| Enable pulse width | PW_{EH} | Fig.a, Fig.b | 230 | - | - | ns |
| Enable rise/fall time | t_{Er}, t_{Ef} | Fig.a, Fig.b | - | - | 20 | ns |
| RS, R/W set up time | t_{AS} | Fig.a, Fig.b | 40 | - | - | ns |
| RS, R/W hold time | t_{H1} | Fig.a, Fig.b | 10 | - | - | ns |
| Data set up time | t_{DSW} | Fig.a | 60 | - | - | ns |
| Data output delay time | t_{DDR} | Fig.b | - | - | 120 | ns |
| Data write hold time | t_{H2} | Fig.a | 10 | - | - | ns |
| Data read hold time | t_{H2} | Fig.b | 5 | - | - | ns |

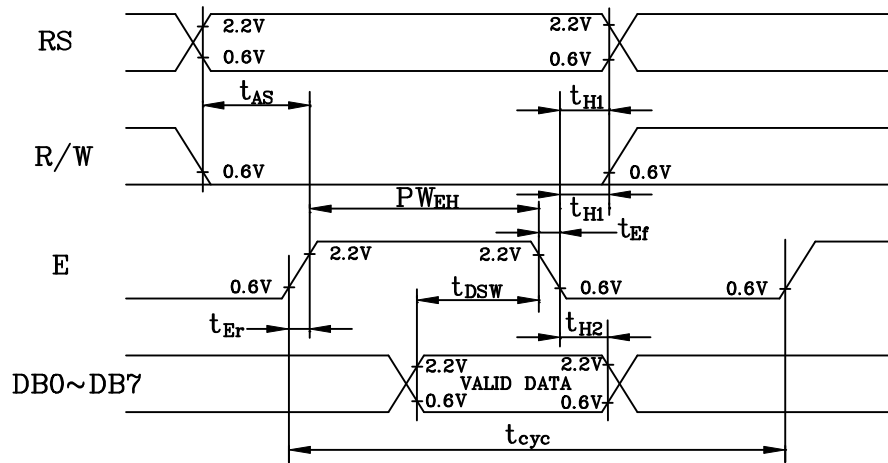


Fig.a Interface timing (data write)

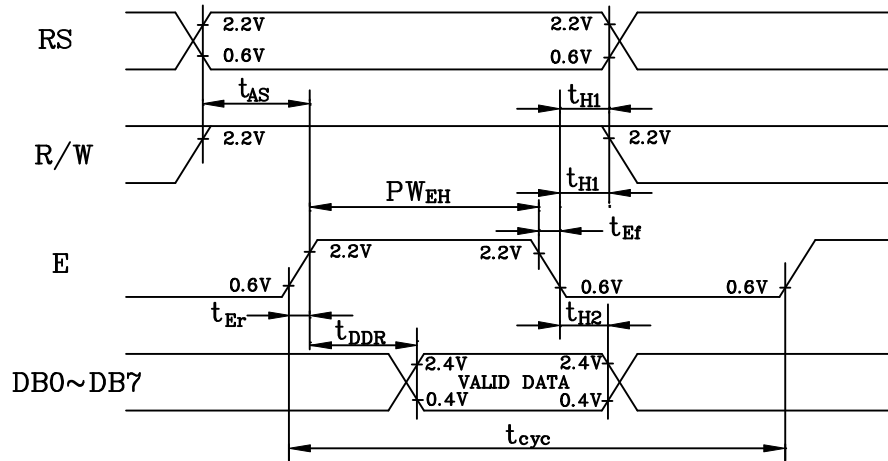


Fig.b Interface timing (data read)



9. RELIABILITY TEST

| NO | ITEM | CONDITION | | | STANDARD | NOTE |
|----|------------------------------------|--|-------|--|---------------------------|----------|
| 1 | High Temp. Storage | 70°C | 120HR | | Appearance without defect | |
| 2 | Low Temp. Storage | -20°C | 120HR | | Appearance without defect | |
| 3 | High Temp. & High Humidity Storage | 40°C 90%RH | 120HR | | Appearance without defect | |
| 4 | Thermal Shock | -20°C,30min → 25°C,5min → 60°C,30min → 25°C,5min (= 1 cycle) | | | Appearance without defect | 5 cycles |

10.LCD PRODUCT QUALITY STANDARD

(1) DISPLAY APPEARANCE

| NO | ITEM | C R I T E R I A | | | | | | | | | | | | | |
|------------------|--|--|------------------|-------------|----------------|---------|-----------------|---------|-----------------|-----------------|----------|----------|----------|------|--|
| 1. | INCLUSIONS (BLACK SPOT , WHITE SPOT , DUST) | (1) ROUND TYPE | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th colspan="2">DIAMETER mm (a*)</th> <th>NO. OF DEFECT*</th> </tr> </thead> <tbody> <tr> <td>a</td> <td>≦ 0.20</td> <td>NEGLECT</td> </tr> <tr> <td>0.20 < a</td> <td>≦ 0.35</td> <td>5 MAX</td> </tr> <tr> <td>0.35 < a</td> <td></td> <td>NONE</td> </tr> </tbody> </table> | DIAMETER mm (a*) | | NO. OF DEFECT* | a | ≦ 0.20 | NEGLECT | 0.20 < a | ≦ 0.35 | 5 MAX | 0.35 < a | | NONE | |
| DIAMETER mm (a*) | | NO. OF DEFECT* | | | | | | | | | | | | | |
| a | ≦ 0.20 | NEGLECT | | | | | | | | | | | | | |
| 0.20 < a | ≦ 0.35 | 5 MAX | | | | | | | | | | | | | |
| 0.35 < a | | NONE | | | | | | | | | | | | | |
| | | (2) LINEAR TYPE | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th>LENGTH mm(L)</th> <th>WIDTH mm(W)</th> <th>NO. OF DEFECT</th> </tr> </thead> <tbody> <tr> <td>N A</td> <td>W ≦ 0.03</td> <td>NEGLECT</td> </tr> <tr> <td>L ≦ 3</td> <td>0.03 < W ≦ 0.08</td> <td>6</td> </tr> <tr> <td>3 < L</td> <td>0.08 < W</td> <td>NONE</td> </tr> </tbody> </table> | LENGTH mm(L) | WIDTH mm(W) | NO. OF DEFECT | N A | W ≦ 0.03 | NEGLECT | L ≦ 3 | 0.03 < W ≦ 0.08 | 6 | 3 < L | 0.08 < W | NONE | |
| LENGTH mm(L) | WIDTH mm(W) | NO. OF DEFECT | | | | | | | | | | | | | |
| N A | W ≦ 0.03 | NEGLECT | | | | | | | | | | | | | |
| L ≦ 3 | 0.03 < W ≦ 0.08 | 6 | | | | | | | | | | | | | |
| 3 < L | 0.08 < W | NONE | | | | | | | | | | | | | |
| 2. | SCRATCH | 1.SCRATCH ON PROTECTIVE FILM IS PERMITTED . 2.SCRATCH ON POLARIZER SHALL BE AS FOLLOW: (1) ROUND TYPE | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th colspan="2">DIAMETER mm (a*)</th> <th>NO. OF DEFECT*</th> </tr> </thead> <tbody> <tr> <td>a</td> <td>≦ 0.15</td> <td>NEGLECT</td> </tr> <tr> <td>0.15 < a</td> <td>≦ 0.20</td> <td>2 MAX</td> </tr> <tr> <td>0.20 < a</td> <td></td> <td>NONE</td> </tr> </tbody> </table> | DIAMETER mm (a*) | | NO. OF DEFECT* | a | ≦ 0.15 | NEGLECT | 0.15 < a | ≦ 0.20 | 2 MAX | 0.20 < a | | NONE | |
| DIAMETER mm (a*) | | NO. OF DEFECT* | | | | | | | | | | | | | |
| a | ≦ 0.15 | NEGLECT | | | | | | | | | | | | | |
| 0.15 < a | ≦ 0.20 | 2 MAX | | | | | | | | | | | | | |
| 0.20 < a | | NONE | | | | | | | | | | | | | |
| | | (2) LINEAR TYPE BE JUDGED BY 1.-(2) LINEAR TYPE | | | | | | | | | | | | | |
| 3. | DENT | DIAMETER < 1.5mm | | | | | | | | | | | | | |
| 4. | BUBBLE | NOT EXCEEDING 0.5mm AVERAGE DIAMETER IS ACCEPTABLE BETWEEN GLASS AND POLARIZING FILM. | | | | | | | | | | | | | |
| 5. | PIN HOLE | (a+b)/2 ≦ 0.15 mm MAXIMUM NUMBER:IGNORED | | | | | | | | | | | | | |
| | | 0.15 < (a+b)/2 ≦ 0.20 MAXIMUM NUMBER:10 | | | | | | | | | | | | | |
| 6. | DOT DEFECT | (a+b)/2 ≦ 0.20 mm MAXIMUM NUMBER:IGNORED | | | | | | | | | | | | | |
| | | 0.20 < (a+b)/2 ≦ 0.30 MAXIMUM NUMBER: 5 x = WIDTH | | | | | | | | | | | | | |
| 7. | CONTRAST IRREGULARITY (SPOT) | DIAMETER SPEC. | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th colspan="2">NO. OF DEFECT*</th> </tr> </thead> <tbody> <tr> <td>a ≦ 0.50 mm</td> <td>NEGLECT</td> </tr> <tr> <td>0.50 < a ≦ 0.75</td> <td>5</td> </tr> <tr> <td>0.75 < a ≦ 1.00</td> <td>3</td> </tr> <tr> <td>1.00 < a</td> <td>NONE</td> </tr> </tbody> </table> | NO. OF DEFECT* | | a ≦ 0.50 mm | NEGLECT | 0.50 < a ≦ 0.75 | 5 | 0.75 < a ≦ 1.00 | 3 | 1.00 < a | NONE | | | |
| NO. OF DEFECT* | | | | | | | | | | | | | | | |
| a ≦ 0.50 mm | NEGLECT | | | | | | | | | | | | | | |
| 0.50 < a ≦ 0.75 | 5 | | | | | | | | | | | | | | |
| 0.75 < a ≦ 1.00 | 3 | | | | | | | | | | | | | | |
| 1.00 < a | NONE | | | | | | | | | | | | | | |
| 8. | DOT WIDTH | DESIGN WIDTH±15% | | | | | | | | | | | | | |
| 9. | COLOR TONE AND UNIFORMITY | OBVIOUS UNEVEN COLOR IS NOT PERMITTED | | | | | | | | | | | | | |



| | | |
|---|---------------|--|
| NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT | SPECIFICATION | SPEC. NO. : LM071-0 DATE : Apr. 15, 1996 SHEET NO. : 15/16 |
|---|---------------|--|

(2) NOTE:

- SAFETY

- 1.If the LCD panel breaks, be careful not to allow the liquid crystal to touch your skin.
- 2.If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water.

- HANDLING

- 1.Prevent all contact with static electricity, which can damage the CMOS ICs. The module is packaged in a static-shielding bag to prevent damage during shipment, warehousing and removal from the shipping carton.
- 2.Do not remove the panel or frame from the module.
- 3.The polarizing plate on the front surface of the display is very fragile and easily scratched. The module is shipped with a protective liner which must be removed from the polarizing plate prior to assembly.
- 4.Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of polarizing plate.
- 5.Do not use ketonics solvent or aromatic solvent on the polarizing plate. Use a soft cloth soaked with plastic-lens cleaning solution.

- STORAGE

- 1.Store the panel or module in a dark place where the temperature is $25^{\circ}\text{C}\pm 5^{\circ}\text{C}$ and the humidity is below 65% RH.
- 2.Do not place the module near organics solvents or corrosive gases.
- 3.Do not crush, shake, or jolt the module.








- TERMS OF WARRANTY

- 1.Acceptance inspection period
The inspection period is within one month after the arrival of the contracted goods at the buyer's factory site.
- 2.Applicable warranty period
The warranty period is within twelve months from the date of invoice under normal usage and storage conditions.

- TYPICAL OPERATING LIFETIME OF BACKLIGHT

- LED : 50,000HR
- EL : 5,000HR
- CCFT : 10,000HR

| | | | | | | | | |
|----------|------------------|--|--|--|--|-----|-----|----|
| REV/DATE | RO/ 04.15.96' | | | | | APP | CHK | BY |
|----------|------------------|--|--|--|--|-----|-----|----|

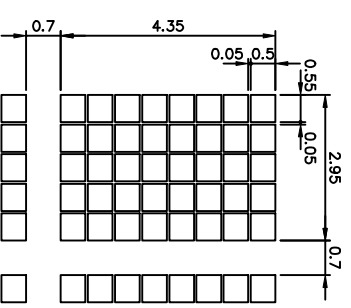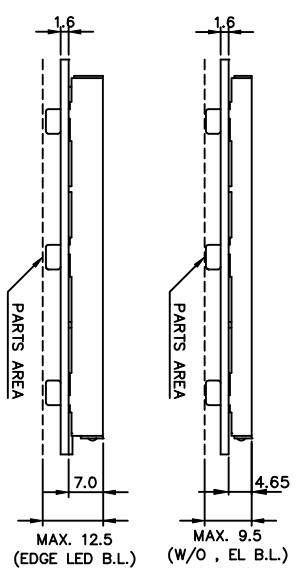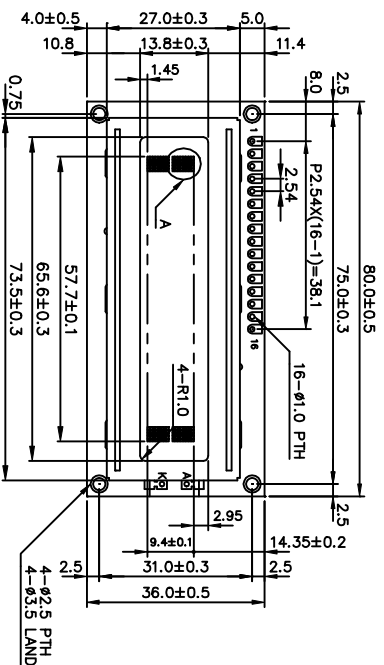

16CX2L
A DETAIL

NOTES:

- 1.RESOLUTION : 16X2 Characters
- 2.CONTROLLER : KS0066
- 3.DC/DC : NONE
- 4.VERSIONS : LM_83_071_1E = EDGE LED B.L.
LM_83_071_4E = w/o, EL B.L., LED B.L.

| Pin No. | Symbol | Description |
|---------|--------|-------------------------|
| 1 | VSS | Power Supply(0V) |
| 2 | VDD | Power Supply(+5V) |
| 3 | VL | Power Supply for LCD |
| 4 | RS | Register Select |
| 5 | R/W | Read/Write Signoe |
| 6 | E | Chip Enable |
| 7 | D0 | Data Bus Line |
| 8 | D1 | |
| 9 | D2 | |
| 10 | D3 | |
| 11 | D4 | |
| 12 | D5 | |
| 13 | D6 | |
| 14 | D7 | |
| 15 | (A) | Anode for LED B.L. (+) |
| 16 | (K) | Cathod for LED B.L. (-) |

| | | |
|---------|--------------|-----------------------------|
| 產品編號 | LM_83_071_1E | 南亞塑膠工業股份有限公司 |
| NAME | | NAN YA PLASTICS CORPORATION |
| DATE | | |
| APPORVE | | 製器圖 |
| CHECK | | DWG-NO MX-X071XXX Rev.A |
| DESIGN | | UNIT : mm |
| DRAW | MAY PING | SCALE : |
| | 85.04.18 | |