
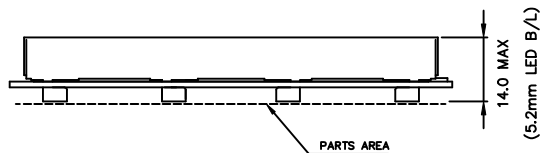


INTERNAL PIN CONNECTION

PinNo.	Symbol	Level	Function
1	V _{SS}	—	0V
2	V _{DD}	—	+5V
3	V _O	—	OPERATING VOLTAGE FOR LCD DRIVING
4	D/I	H/L	H:DATA INPUT L:INSTRUCTION CODE INPUT
5	R/W	H/L	H:DATA READ (LCM TO MPU) L:DATA WRITE (MPU TO LCM)
6	E	H,H->L	ENABLE SIGNAL
7	DB0	H/L	DATA BUS LINE
8	DB1	H/L	
9	DB2	H/L	
10	DB3	H/L	
11	DB4	H/L	
12	DB5	H/L	
13	DB6	H/L	
14	DB7	H/L	
15	CS1	H	CHIP SELECT FOR IC1
16	CS2	H	CHIP SELECT FOR IC2
17	RES	L	RESET ACTIVE "L"
18	VEE	—	NEGATIVE VOLTAGE OUTPUT
19	K	—	CATHODE FOR EL/LED BACKLIGHT
20	A	—	ANODE FOR EL/LED BACKLIGHT

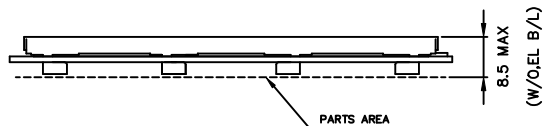

NOTE :

1. RESOLUTION : 128 X 64 DOTS
2. CONTROLLER : WITHOUT
3. DC/DC CONVERTER : BUILT-IN
4. GENERAL TOLERANCE : ±0.5 mm

產品編號	LM_97_005_	南亞塑膠工業股份有限公司 NAN YA PLASTICS CORPORATION		
APPROVE	NAME	DATE	TITLE	製品圖
CHECK			DWG-No	MX-X005X Rev.A
DESIGN			THIRD ANGLE PROJECT	UNIT : mm
DRAW	MAY PING	86.07.08		SCALE : 1/1