

NAN YA PLASTICS CORP.
ELEC. MATERIALS DIV.
LCD DEPARTMENT

SPECIFICATION

SPEC. NO. : LM077-0
DATE : August.18, 1998
SHEET NO. : 1/18

U.S. MARKETING ARM:

MARK PRODUCTS CORPORATION
800 N. EDGEWOOD AVENUE
WOOD DALE, IL 60191
TEL: 630-787-9089
FAX: 630-787-9015

SPECIFICATION OF LCD MODULE 128x64 PRODUCT NO.: LM_77_077

SPEC. NO.: LM077-0-0

CUSTOMER
APPROVED BY
DATE:

EDITED ON : AUGUST.18.1998


SALE MANAGER	TECHNICAL APPROVE	DESIGN MANAGER	DESIGN CHECK	DESIGNER

REV/DATE	R0/ 08.18,98'					APP	CHK	BY
----------	------------------	--	--	--	--	-----	-----	----

1. MECHANICAL DATA

- (1) Product No. LM_77_077_
- (2) Module Size 78.0 (W)mm x 70.0 (H)mm x MAX9.5 (D)mm (W/O,EL B/L)
 78.0 (W)mm x 70.0 (H)mm x MAX13.0 (D)mm (LED B/L)
- (3) Dot Size 0.39 (W)mm x 0.55 (H)mm
- (4) Dot Pitch 0.44 (W)mm x 0.60 (H)mm
- (5) Number of Dots 128 (W) x 64 (H)Dots
- (6) Duty 1/64
- (7) LCD Display Mode STN: Gray Mode Yellow Mode Blue Mode
 FSTN: Black and White(Normal White/Positive Image)
 Black and White(Normal Black/Negative Image)
 Rear Polarizer: Reflective Transflective Transmissive
- (8) Viewing Direction 6 O'clock 12 O'clock ___O'clock
- (9) Backlight W/O LED EL
- (10) Weight W/O : 56 g
 EL B/L : 59 g
 LED B/L : 72 g

Note :

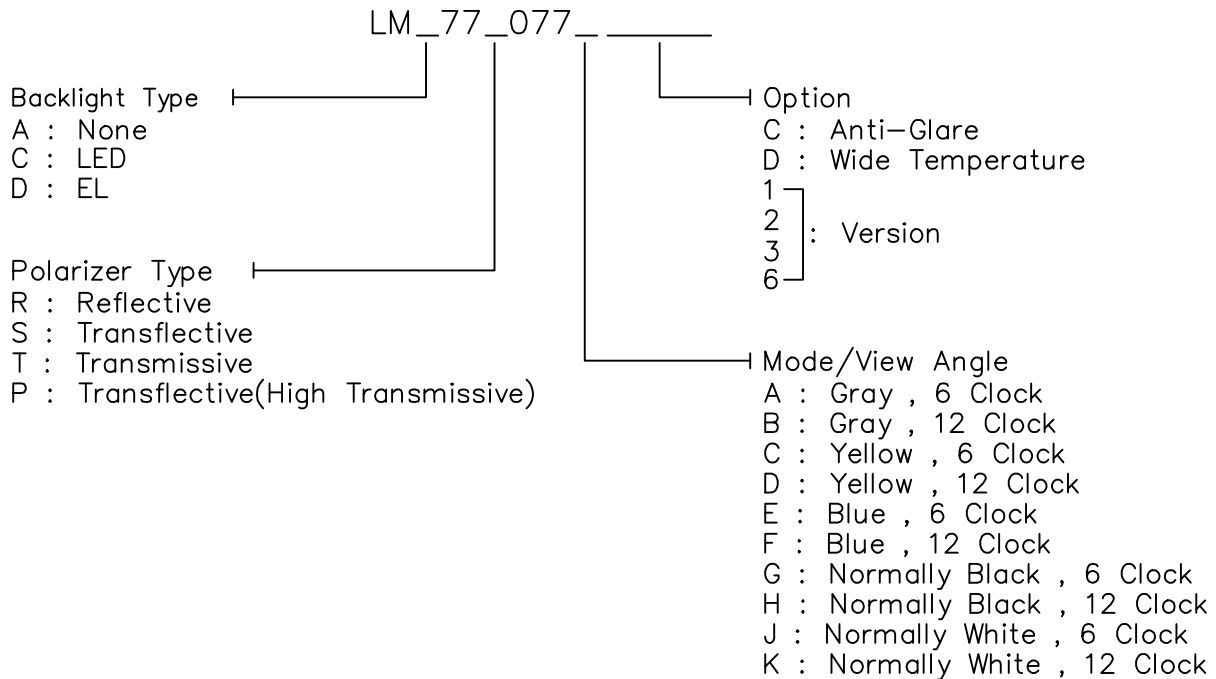

REV/DATE	R0/ 08.18,98'					APP	CHK	BY
----------	------------------	--	--	--	--	-----	-----	----

2. ABSOLUTE MAXIMUM RATINGS

(1) ELECTRICAL ABSOLUTE RATINGS

V_{SS}=0V

ITEM	SYMBOL	MIN	MAX	UNIT	COMMENT
Power Supply for Logic	VCC-VSS	-0.3	7.0	V	
Input Voltage	V _I	-0.3	VCC	V	
Static Electricity	-	-	-	-	Note 1

Note 1 LCM should be grounded during handling LCM.

(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	NORMAL TEMP.				WIDE TEMP.			
	OPERATING		STORAGE		OPERATING		STORAGE	
	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	0	50	-20	70	-20	70	-30	80
Humidity (Without Condensation)	Note 2,4		Note 3,4		Note 4,5		Note 4,6	

Note 2 Ta ≤ 50°C : 85%RH max

Ta > 50°C : Absolute humidity must be lower
than the humidity of 85%RH at 50°C

Note 3 Ta at -20°C will be < 48hrs, at 70°C will be < 120hrs

Note 4 Background color changes slightly depending on ambient temperature.
This phenomenon is reversible.

Note 5 Ta ≤ 70°C : 75%RH max

Ta > 70°C : Absolute humidity must be lower
than the humidity of 75%RH at 70°C

Note 6 Ta at -30°C will be < 48hrs, at 80°C will be < 120hrs

REV/DATE	R0/ 08.18,98'					APP	CHK	BY
----------	------------------	--	--	--	--	-----	-----	----

3. ELECTRICAL CHARACTERISTICS

(VCC= 5V ± 10%)

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT											
Input Voltage	V _{IH}	H level	0.7V _{DD}	—	V _{DD}	V											
	V _{IL}	L level	0	—	0.3V _{DD}	V											
Recommended LC Driving Voltage (Normal Temp. LCM)	VCC-V _O	0℃	—	13.3	13.8	V											
		25℃	11.7	12.5	13.1												
		50℃	10.8	11.4	—												
Recommended LC Driving Voltage (Wide Temp. LCM)	VCC-V _O	-20℃	11.7	12.1	12.5	V											
		0℃	11.6	12.0	12.4												
		25℃	11.5	11.9	12.3												
		50℃	11.4	11.8	12.2												
		70℃	11.3	11.7	12.1												
Power Supply Current	I _{CC}	VCC = 5.0V VCC-V _O =12.5V BIAS = 1/9 PATTERN :	—	1.0	2.5	mA											
	I _O	<table style="border: none; margin: 0;"> <tr> <td>□</td><td>■</td><td>□</td><td>■</td><td>□</td><td>■</td> </tr> <tr> <td>■</td><td>□</td><td>■</td><td>□</td><td>■</td><td>□</td> </tr> </table>	□	■	□	■	□	■	■	□	■	□	■	□	—	1.03	3.0
□	■	□	■	□	■												
■	□	■	□	■	□												
LED Power Supply Current	I _{LED}	V _{BL} = 5V _{DC} (R _{BL} = 5Ω)	—	210	—	mA											
EL Power Supply Current	I _{EL}	V _{BL} = 110V _{AC} 400Hz (R _{BL} = 0Ω)	—	—	5.0	mA											

4-1. OPTICAL CHARACTERISTICS

(For Normal Temperature Mode LCM)

AT Vop

MODE	ITEM	Cr(Contrast Ratio)		θ (Viewing Angle)		ϕ (Viewing Angle)	
		25℃		25℃		25℃	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
R	A	3.5	4.5	50	75	20	30
	C	4.5	7.5	55	80	20	35
	J	6.0	8.0	60	85	20	35
S	A	3.0	4.2	50	70	20	30
	C	4.0	6.5	50	75	20	35
	J	5.0	7.5	55	80	20	35
note		FIG6		FIG5			

note:

R: REFLECTIVE
S: TRANSFLECTIVE
A: GRAY
C: YELLOW
J: NORMALLY WHITE

AT $\phi=0^\circ$ $\theta=0^\circ$

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	0℃	-	600	1200	ms	FIG2
		25℃	-	110	220		
		50℃	-	50	100		
Response Time (fall)	Tf	0℃	-	900	1500	ms	FIG2
		25℃	-	250	360		
		50℃	-	100	150		

4-2.OPTICAL CHARACTERISTICS

(For Wide Temperature Mode LCM)

AT Vop

ITEM MODE		Cr(Contrast Ratio)		θ (Viewing Angle)		ϕ (Viewing Angle)	
		25℃		25℃		25℃	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
R	A	3.5	4.2	50	68	20	30
	C	5.0	7.0	50	60	30	35
	J	6.0	8.0	50	70	20	38
S	A	3.5	4.0	50	65	20	30
	C	5.0	7.0	50	60	25	35
	J	5.0	7.0	50	70	25	35
note		FIG6		FIG5			

note:


R: REFLECTIVE
S: TRANSFLECTIVE
A: GRAY
C: YELLOW
J: NORMALLY WHITE

AT $\phi=0^\circ$ $\theta=0^\circ$


ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	-20℃	-	2100	3200	ms	FIG 2
		0℃	-	450	680		
		25℃	-	150	250		
		50℃	-	110	170		
		70℃	-	70	90		
Response Time (fall)	Tf	-20℃	-	2100	3200	ms	FIG 2
		0℃	-	400	600		
		25℃	-	120	180		
		50℃	-	60	100		
		70℃	-	30	50		

(NOTE 1)

Definition of Operation Voltage(Vop)

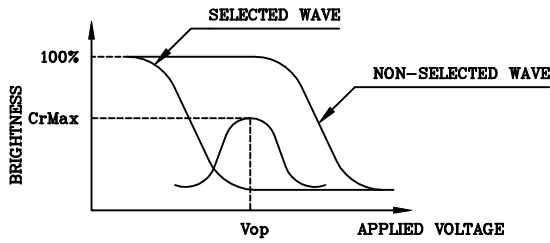

(positive type)

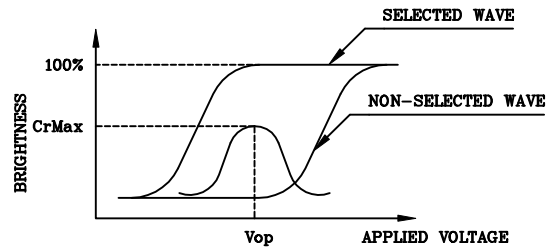


(negative type)

*Conditions


Viewing Angle : 0
Frame Frequency : 70Hz
Applied Waveform : 1/N duty, 1/a bias

(NOTE 2)

Definition of Response Time(Tr,Tf)

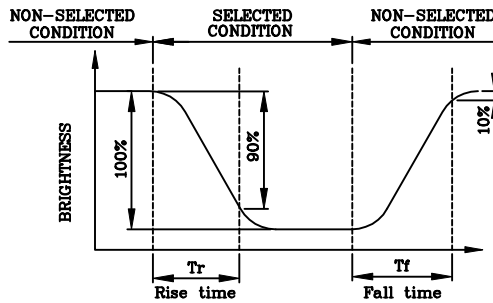

(positive type)

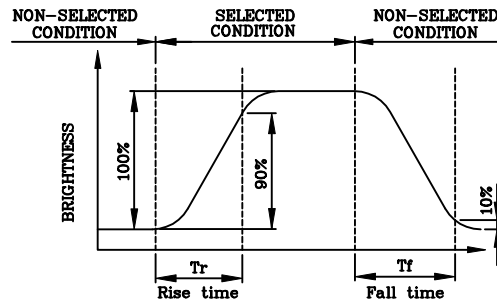


(negative type)

*Conditions


Operating Voltage : Vop
Viewing Angle (θ,φ) : (0,0)
Frame Frequency : 70Hz
Applied Waveform : 1/N duty, 1/a bias

(NOTE 3)

Description of Measuring Equipment and Driving Waveforms

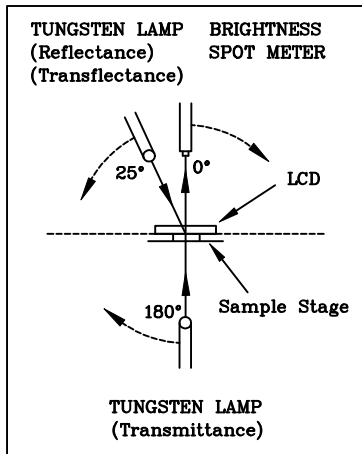


CONST.
TEMP.
CHAMBER

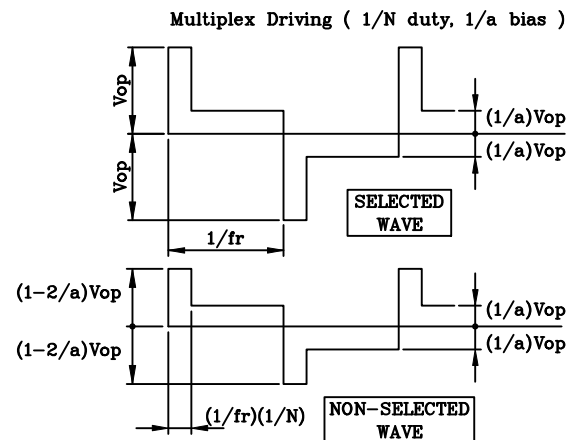


(NOTE 4)

Definition of Viewing Direction

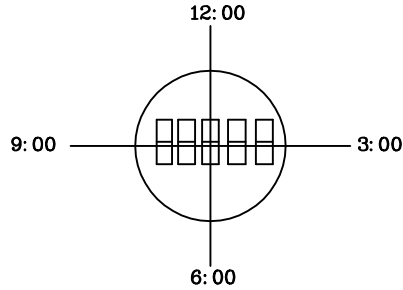

(NOTE 5)

Definition of Viewing Angle

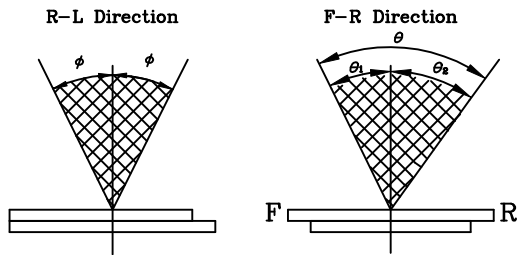


*Conditions


Operating Voltage : V_{op}
 Frame Frequency : 70Hz
 Applied Waveform : 1/N duty, 1/a bias
 Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

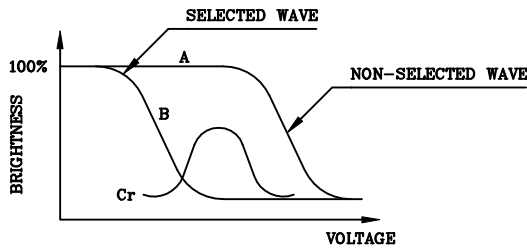

(positive type)

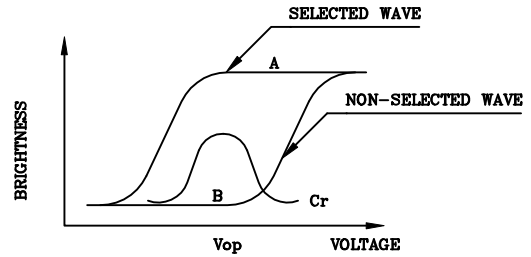


(negative type)

Contrast Ratio : $Cr=A/B$

*Conditions

Viewing Angle : 0
 Frame Frequency : 70Hz
 Applied Waveform : 1/N duty, 1/a bias


5. BLOCK DIAGRAM

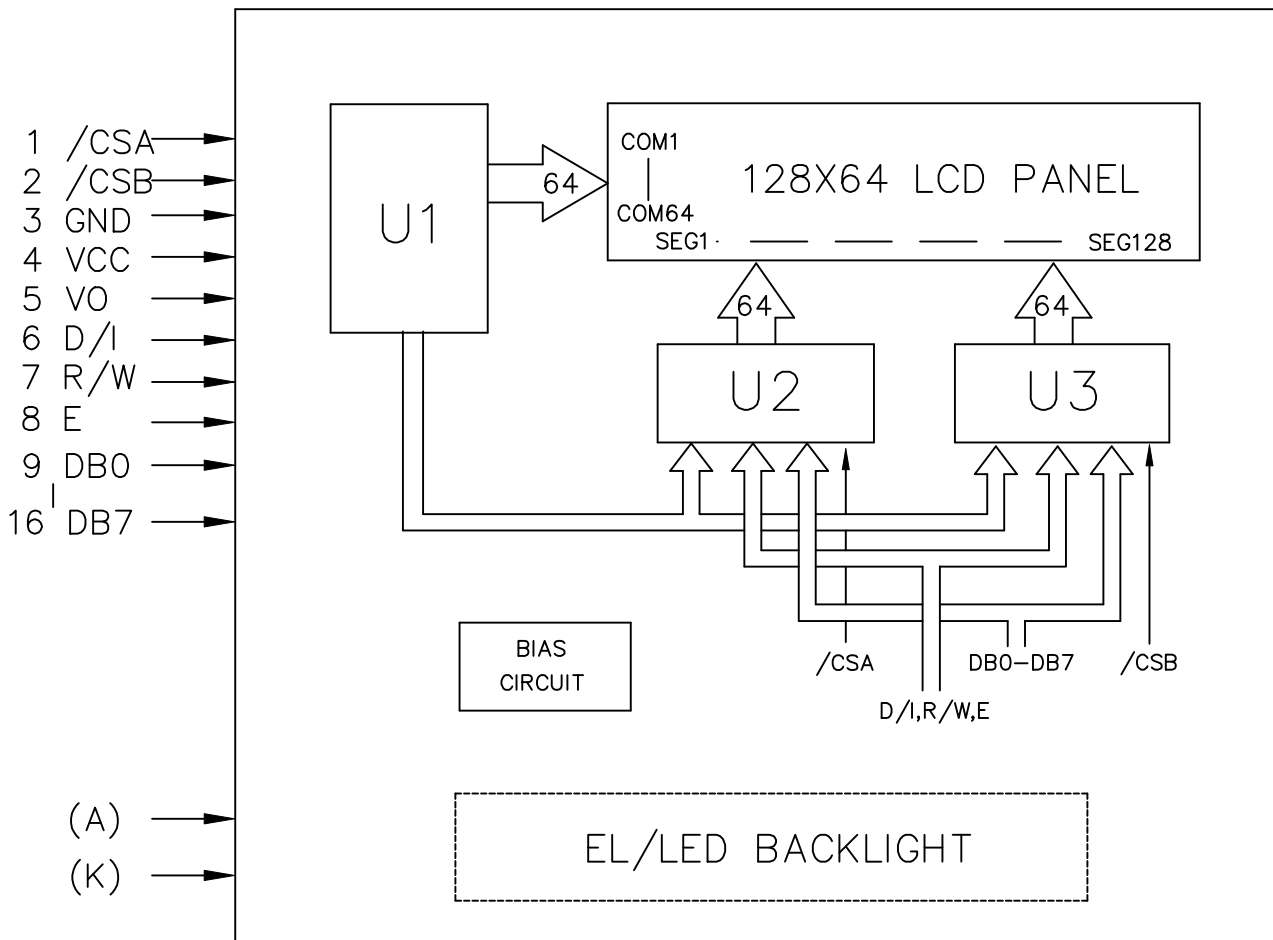

6.INTERNAL PIN CONNECTION

PinNo.	Symbol	Level	Function
1	/CSA	L	CHIP SELECT FOR U1
2	/CSB	L	CHIP SELECT FOR U2
3	GND	—	GROUND
4	VCC	—	POWER SUPPLY FOR LOGIC(+5V)
5	VO	—	POWER SUPPLY FOR LCD DRIVING
6	D/I	H/L	H:DATA INPUT L:INSTRUCTION CODE INPUT
7	R/W	H/L	H:DATA READ (FROM LCM TO MPU) L:DATA WRITE (FROM MPU TO LCM)
8	E	H,H->L	ENABLE SIGNAL
9	DB0	H/L	DATA BUS LINE
10	DB1	H/L	
11	DB2	H/L	
12	DB3	H/L	
13	DB4	H/L	
14	DB5	H/L	
15	DB6	H/L	
16	DB7	H/L	
(A)	A	—	ANODE OF BACKLIGHT
(K)	K	—	CATHODE OF BACKLIGHT

7. POWER SUPPLY

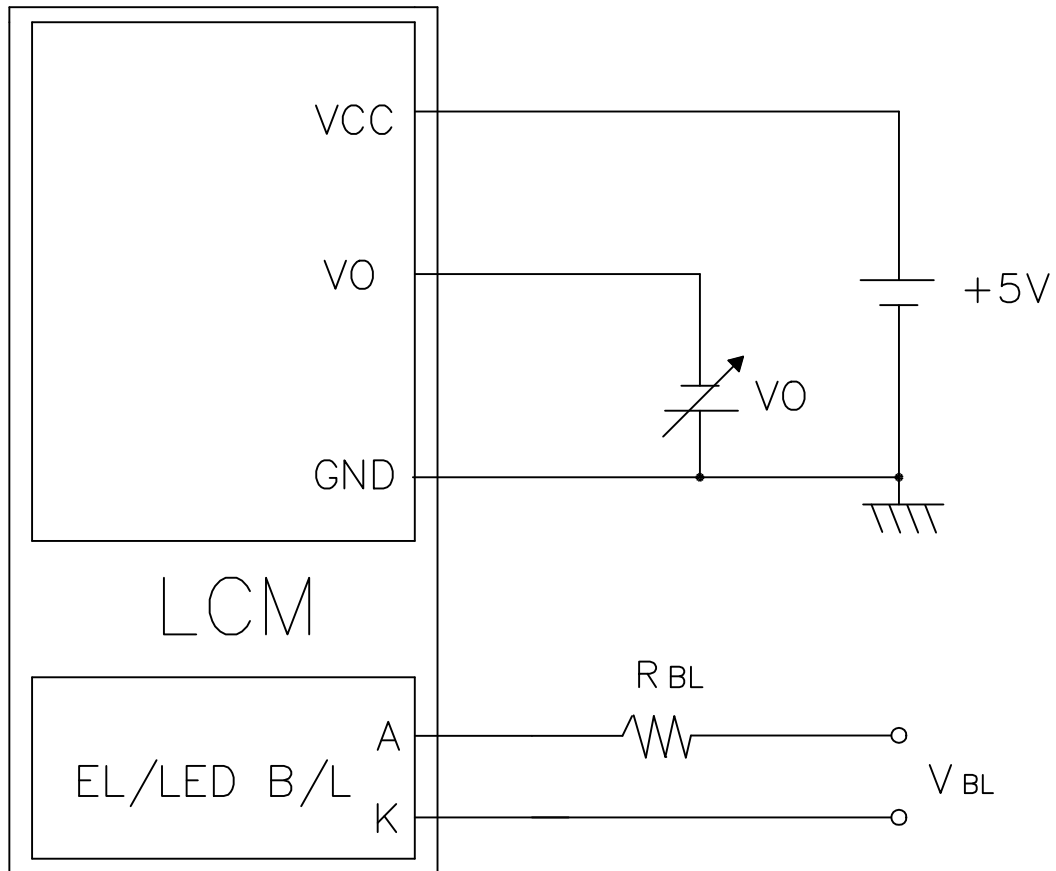

Recommended Value for R_{BL} and V_{BL}

ITEM Back Light Interface	R_{BL}		V_{BL}	
	EL	LED	EL	LED
A,K PIN	0 Ω	5 Ω	110V _{Ac} 400Hz	5V _{Dc}

8-1. TIMING CHARACTERISTICS

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Enable cycle time	t_{cyc}	Fig.a , Fig.b	1000	-	-	ns
E high level width	P_{WEH}	Fig.a , Fig.b	450	-	-	ns
E low level width	P_{WEL}	Fig.a , Fig.b	450	-	-	ns
E rise/fall time	t_r, t_f	Fig.a , Fig.b	-	-	25	ns
Address set up time	t_{AS}	Fig.a , Fig.b	140	-	-	ns
Address hold time	t_{AH}	Fig.a , Fig.b	10	-	-	ns
Data delay time	t_{DDR}	Fig.b	-	-	320	ns
Data set up time	t_{DSW}	Fig.a	200	-	-	ns
Data hold time (WR)	t_{DHW}	Fig.a	10	-	-	ns
Data hold time (RD)	t_{DHR}	Fig.b	20	-	-	ns

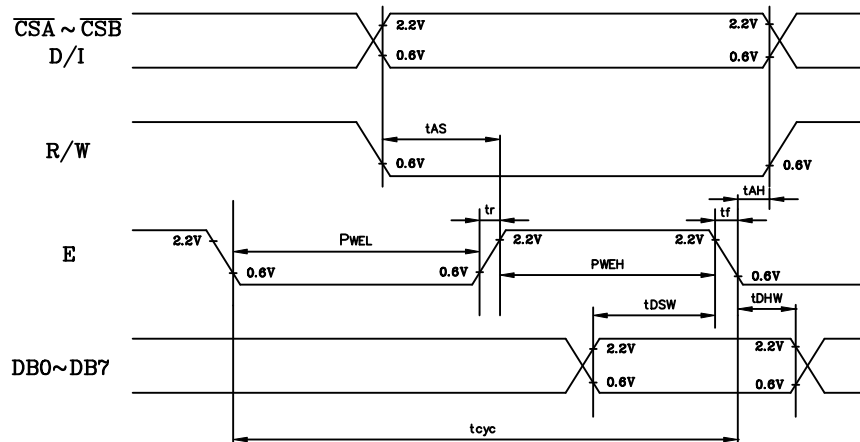


Fig . a Interface timing (data write)



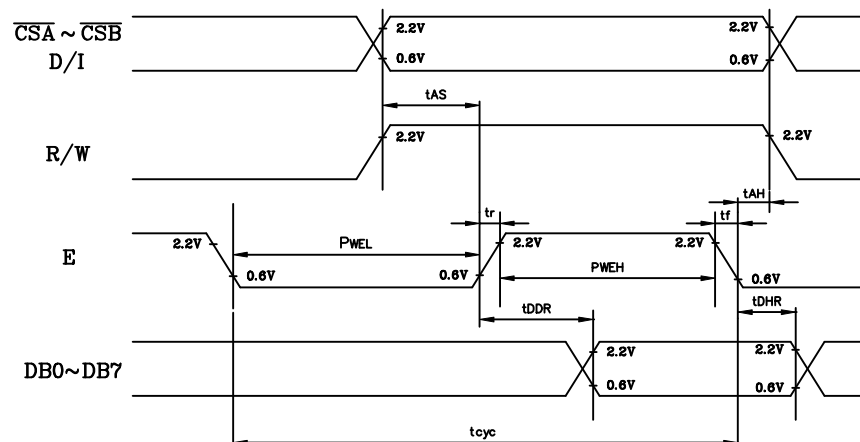


Fig . b Interface timing (data read)

8-2. RELATION BETWEEN DISPLAY PATTERN AND DRIVERS

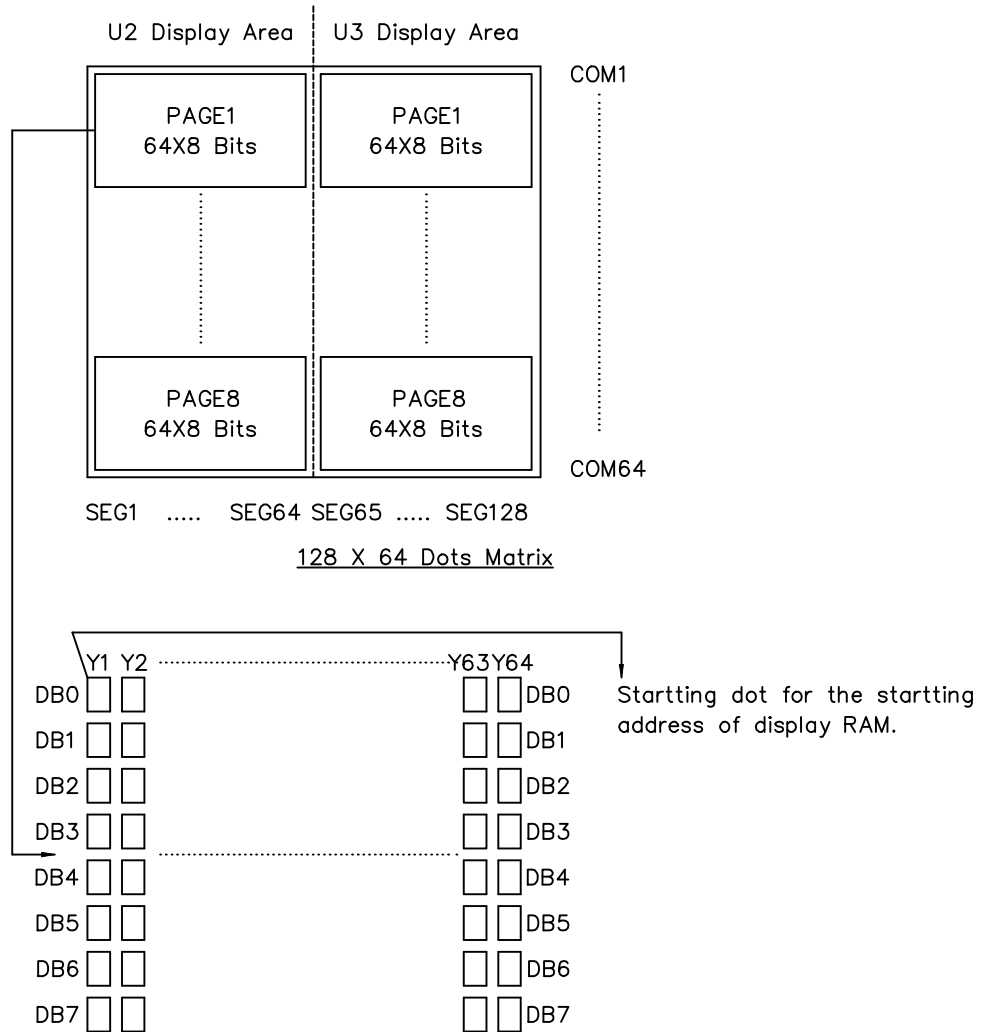

Each segment driver has 8 pages RAM , and each page has 64 x 8 bits RAM .
 DB0~DB7 are 8 bits transmitted data , where DB0 is LSB and DB7 is MSB .

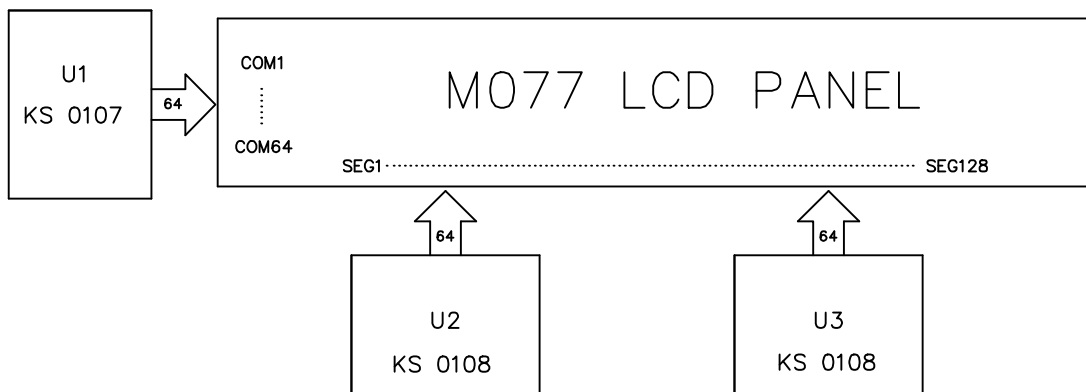

8-3.DISPLAY CONTROL INSTRUCTION

The display control instructions control the internal state of the KS0108B. Instructions is received from MPU to KS0108B for the display control.




Instruction	D/I	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	FUNCTION
Display ON/OFF	0	0	0	0	1	1	1	1	1	0/1	Controls the display on or off. Internal status and display RAM data is not affected. 0:OFF , 1:ON
Set Address	0	0	0	1	Y address(0~63)						Sets the Y address in the Y address counter.
Set Page (X address)	0	0	1	0	1	1	1	Page(0~7)			Sets the X address at the X address register.
Display Start Line	0	0	1	1	Display start line(0~63)						Indicates the display data RAM displayed at the top of the the screen.
Status Read	0	1	BUSY	0	ON/OFF	RESET	0	0	0	0	Read status. BUSY 0:Ready 1:In operation ON/OFF 0:Display ON 1:Display OFF RESET 0:Normal 1:Reset
Write Display Data	1	0	Write Data								Writes data(DB0:7) into display data RAM. After writing instruction, Y address is increased by 1 automatically.
Read Display Data	1	1	Read Data								Reads data(DB0:7) from display data RAM to the data bus.

9. RELIABILITY TEST

NO	ITEM	CONDITION			STANDARD	NOTE
1	High Temp. Storage	70°C	120HR		Appearance without defect	
2	Low Temp. Storage	-20°C	120HR		Appearance without defect	
3	High Temp. & High Humidity Storage	40°C 90%RH	120HR		Appearance without defect	
4	Thermal Shock	-20°C,30min → 25°C,5min → 60°C,30min → 25°C,5min (= 1 cycle)			Appearance without defect	5 cycles

10.LCD PRODUCT QUALITY STANDARD

(1) DISPLAY APPEARANCE

NO	ITEM	C R I T E R I A													
1.	INCLUSIONS (BLACK SPOT , WHITE SPOT , DUST)	(1) ROUND TYPE													
		<table border="1"> <thead> <tr> <th colspan="2">DIAMETER mm (a*)</th> <th>NO. OF DEFECT*</th> </tr> </thead> <tbody> <tr> <td>$a \leq 0.20$</td> <td>$a < 0.20$</td> <td>NEGLECT</td> </tr> <tr> <td>$a \leq 0.35$</td> <td>$a < 0.35$</td> <td>5 MAX</td> </tr> <tr> <td></td> <td></td> <td>NONE</td> </tr> </tbody> </table>	DIAMETER mm (a*)		NO. OF DEFECT*	$a \leq 0.20$	$a < 0.20$	NEGLECT	$a \leq 0.35$	$a < 0.35$	5 MAX			NONE	
DIAMETER mm (a*)		NO. OF DEFECT*													
$a \leq 0.20$	$a < 0.20$	NEGLECT													
$a \leq 0.35$	$a < 0.35$	5 MAX													
		NONE													
		(2) LINEAR TYPE													
		<table border="1"> <thead> <tr> <th>LENGTH mm(L)</th> <th>WIDTH mm(W)</th> <th>NO. OF DEFECT</th> </tr> </thead> <tbody> <tr> <td>N A</td> <td>$W \leq 0.03$</td> <td>NEGLECT</td> </tr> <tr> <td>$L \leq 3$</td> <td>$0.03 < W \leq 0.08$</td> <td>6</td> </tr> <tr> <td>$3 < L$</td> <td>$0.08 < W$</td> <td>NONE</td> </tr> </tbody> </table>	LENGTH mm(L)	WIDTH mm(W)	NO. OF DEFECT	N A	$W \leq 0.03$	NEGLECT	$L \leq 3$	$0.03 < W \leq 0.08$	6	$3 < L$	$0.08 < W$	NONE	
LENGTH mm(L)	WIDTH mm(W)	NO. OF DEFECT													
N A	$W \leq 0.03$	NEGLECT													
$L \leq 3$	$0.03 < W \leq 0.08$	6													
$3 < L$	$0.08 < W$	NONE													
2.	SCRATCH	1.SCRATCH ON PROTECTIVE FILM IS PERMITTED . 2.SCRATCH ON POLARIZER SHALL BE AS FOLLOW: (1) ROUND TYPE													
		<table border="1"> <thead> <tr> <th colspan="2">DIAMETER mm (a*)</th> <th>NO. OF DEFECT*</th> </tr> </thead> <tbody> <tr> <td>$a \leq 0.15$</td> <td>$a < 0.15$</td> <td>NEGLECT</td> </tr> <tr> <td>$a \leq 0.20$</td> <td>$a < 0.20$</td> <td>2 MAX</td> </tr> <tr> <td></td> <td></td> <td>NONE</td> </tr> </tbody> </table>	DIAMETER mm (a*)		NO. OF DEFECT*	$a \leq 0.15$	$a < 0.15$	NEGLECT	$a \leq 0.20$	$a < 0.20$	2 MAX			NONE	
DIAMETER mm (a*)		NO. OF DEFECT*													
$a \leq 0.15$	$a < 0.15$	NEGLECT													
$a \leq 0.20$	$a < 0.20$	2 MAX													
		NONE													
		(2) LINEAR TYPE BE JUDGED BY 1.-(2) LINEAR TYPE													
3.	DENT	DIAMETER < 1.5mm													
4.	BUBBLE	NOT EXCEEDING 0.5mm AVERAGE DIAMETER IS ACCEPTABLE BETWEEN GLASS AND POLARIZING FILM.													
5.	PIN HOLE	$(a+b)/2 \leq 0.15$ mm MAXIMUM NUMBER: IGNORED $0.15 < (a+b)/2 \leq 0.20$ MAXIMUM NUMBER: 10													
6.	DOT DEFECT	$(a+b)/2 \leq 0.20$ mm MAXIMUM NUMBER: IGNORED $0.20 < (a+b)/2 \leq 0.30$ MAXIMUM NUMBER: 5 x = WIDTH	 												
7.	CONTRAST IRREGULARITY (SPOT)	DIAMETER SPEC. $a \leq 0.50$ mm $0.50 < a \leq 0.75$ $0.75 < a \leq 1.00$ $1.00 < a$	NO. OF DEFECT* NEGLECT 5 3 NONE												
8.	DOT WIDTH	DESIGN WIDTH ±15%													
9.	COLOR TONE AND UNIFORMITY	OBVIOUS UNEVEN COLOR IS NOT PERMITTED													

NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT	SPECIFICATION	SPEC. NO. : LM077-0 DATE : August.18, 1998 SHEET NO. : 17/18
---	---------------	--

(2) NOTE:

- SAFETY
 - 1.If the LCD panel breaks, be careful not to allow the liquid crystal to touch your skin.
 - 2.If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water.



- HANDLING
 - 1.Prevent all contact with static electricity, which can damage the CMOS ICs. The module is packaged in a static-shielding bag to prevent damage during shipment, warehousing and removal from the shipping carton.
 - 2.Do not remove the panel or frame from the module.
 - 3.The polarizing plate on the front surface of the display is very fragile and easily scratched. The module is shipped with a protective liner which must be removed from the polarizing plate prior to assembly.
 - 4.Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of polarizing plate.
 - 5.Do not use ketonics solvent or aromatic solvent on the polarizing plate. Use a soft cloth soaked with plastic-lens cleaning solution.

- STORAGE
 - 1.Store the panel or module in a dark place where the temperature is $25^{\circ}\text{C}\pm 5^{\circ}\text{C}$ and the humidity is below 65% RH.
 - 2.Do not place the module near organics solvents or corrosive gases.
 - 3.Do not crush, shake, or jolt the module.

- TERMS OF WARRANTY
 - 1.Acceptance inspection period
The inspection period is within one month after the arrival of the contracted goods at the buyer's factory site.
 - 2.Applicable warranty period
The warranty period is within twelve months from the date of invoice under normal usage and storage conditions.

- TYPICAL OPERATING LIFETIME OF BACKLIGHT
 - LED : 50,000HR
 - EL : 5,000HR
 - CCFT : 10,000HR

REV/DATE	R0/ 08.18,98'					APP	CHK	BY
----------	------------------	--	--	--	--	-----	-----	----

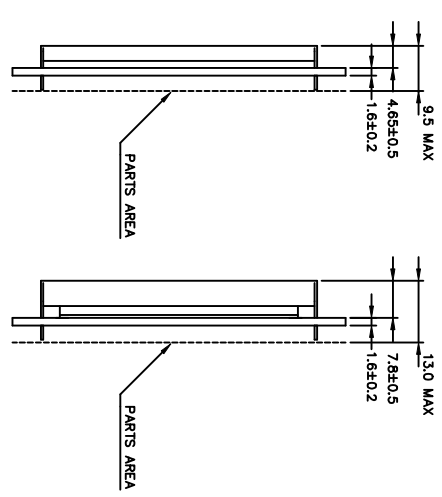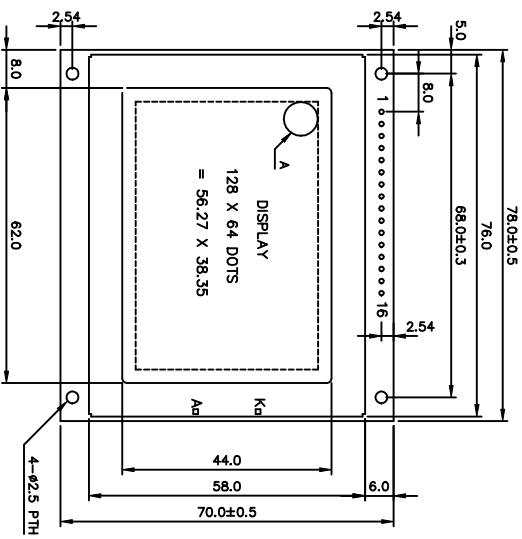


(W/O,EL B/L)

(LED B/L)


PIN CONNECTION

Pin No.	Symbol
1	/CSA
2	/CSB
3	GND
4	VCC
5	VO
6	D/I
7	R/W
8	E
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7

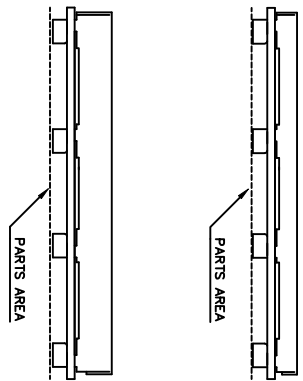

(LED B/L)

(W/O,EL B/L)



NOTES :

1. Resolution: 128X64 Dots

產品編號	LM_77_077_	南亞塑膠工業股份有限公司
NAME	DATE	NAN YA PLASTICS CORPORATION
APPROVE		製品圖
CHECK		DWG-NO Mx-x077x Rev.A
DESIGN		UNIT : mm
DRAW	MAY PING 87.08.18	SCALE : 1/1