



INTERNAL PIN CONNECTION

PinNo.	Symbol	Level	Function
1	V _{SS}	-	0V Power supply
2	V _{DD}	-	+5V Power supply
3	V ₀	-	OPERATING VOLTAGE FOR LCD DRIVING
4	D/I	H/L	RGB DATA INPUT L: INSTRUCTION CODE INPUT
5	R/W	H/L	RGB DATA READ (FROM LOW TO MPU) L: DATA WRITE (FROM MPU TO LOW)
6	E	H, H->L	ENABLE SIGNAL
7	DB0	H/L	DATA BUS LINE
8	DB1	H/L	
9	DB2	H/L	
10	DB3	H/L	
11	DB4	H/L	
12	DB5	H/L	
13	DB6	H/L	
14	DB7	H/L	
15	CS1	H	CHIP SELECT FOR IC1
16	CS2	H	CHIP SELECT FOR IC2
17	CS3	H	CHIP SELECT FOR IC3
18	RES	L	RESET
19	VEE	-	POWER SUPPLY FOR LCD DRIVING
20	NC	-	NONE CONNECTION
21	NC	-	NONE CONNECTION
22	NC	-	NONE CONNECTION

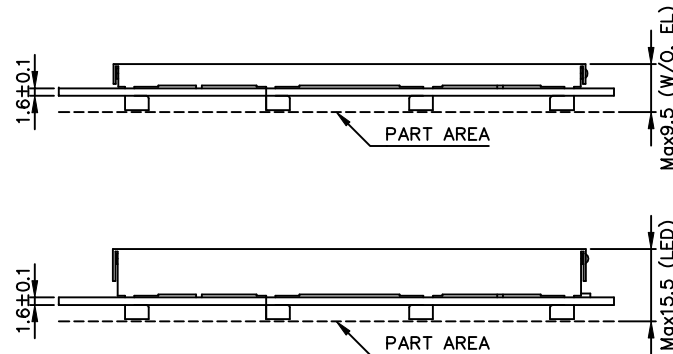

Note :
 1. Resolution : 150X32 Dots
 2. General Tolerance : ±0.5mm

產品編號 LM_B4_031_		南亞塑膠工業股份有限公司 NAN YA PLASTICS CORPORATION	
APPROVE	NAME	DATE	TITLE
CHECK			製品圖
DESIGN			DWG-NO
DRAW	MAY PING	87..03.02	MXBX031X Rev.A
THIRD ANGLE PROJECT			UNIT : mm SCALE : 2/3