



B DETAIL

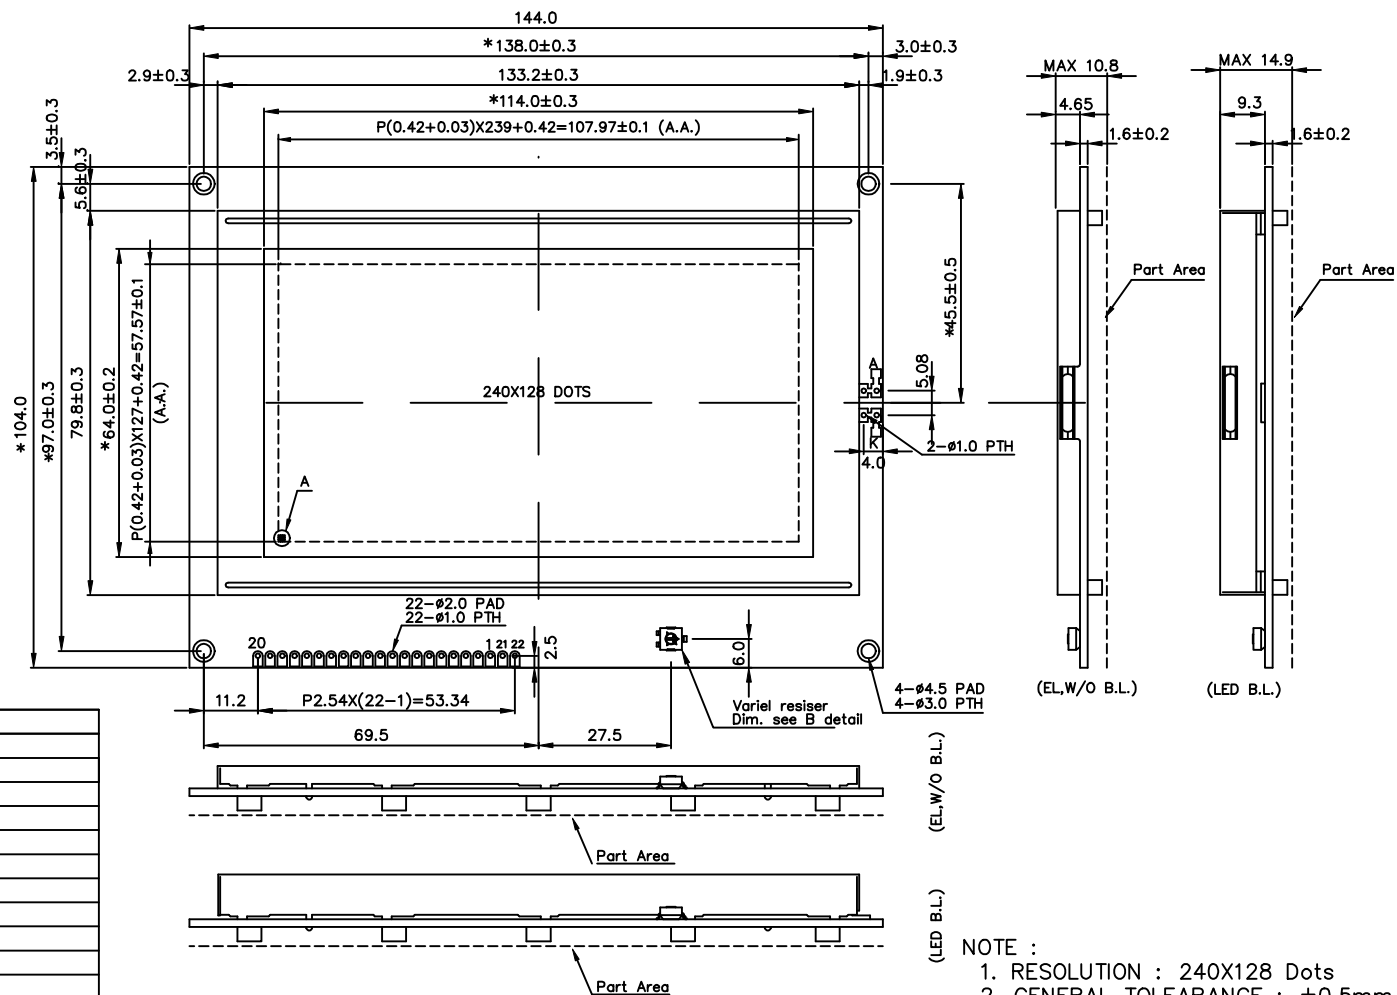

A DETAIL

Pin No.	Symbol	Description
1	VSS	GROUND ( 0V )
2	VDD	Logic Supply Voltage (+5V)
3	N.C.	-
4	C/D	"H" : Command "L" : DATA
5	RD	DATA READ
6	WR	DATA WRITE
7	DB0	Data bit 0
8	DB1	Data bit 1
9	DB2	Data bit 2
10	DB3	Data bit 3
11	DB4	Data bit 4
12	DB5	Data bit 5
13	DB6	Data bit 6
14	DB7	Data bit 7
15	CE	Chip Enable
16	RES	Reset
17	N.C.	-
18	MD2	Font Size Selection
19	FS1	Font Size Selection
20	FG/NC	Frame Ground or NC
21	A+	Power Supply for LED/EL B.L.
22	K-	

- NOTE :
1. RESOLUTION : 240X128 Dots
  2. GENERAL TOLERANCE : ±0.5mm
  3. Controller : T6963C
  4. Logic Voltage : 5V.

產品編號	LM_EA_184_1	南亞塑膠工業股份有限公司 NAN YA PLASTICS CORPORATION	
APPROVE	NAME	DATE	TITLE
CHECK			製品圖
DESIGN			DWG-NO MXAX184X1 Rev.A
DRAW	MAY PING	87.10.02	UNIT : mm SCALE : 1/1