


PIN ASSIGNMENT OF I/O CONNECTION

Pin No.	SYMBOL	LEVEL	FUNCTION
1	FLM	H/L	FIRST LINE MARKER
2	LP	H-L	DATA LATCH SIGNAL
3	CP	H-L	DATA SHIFT CLOCK SIGNAL
4	DISPOFF	H/L	H: ON/L: OFF
5	VDD	-	POWER SUPPLY FOR LOGIC
6	VSS	-	GND
7	VLCD	-	POWER SUPPLY FOR LCD DRIVER (+)
8	D0	H/L	Display Data
9	D1	H/L	Display Data
10	D2	H/L	Display Data
11	D3	H/L	Display Data
12	D4	-	No Connection
13	D5	-	No Connection
14	D6	-	No Connection
15	D7	-	No Connection
16	VSS	-	GND

PIN ASSIGNMENT OF CCFL CONNECTION

Pin No.	SYMBOL	LEVEL	FUNCTION
1	HOT	-	Power Supply for CCFL(HOT)
2	NC	-	No Connection
3	NC	-	No Connection
4	GND	-	Power Supply for CFL(GND)

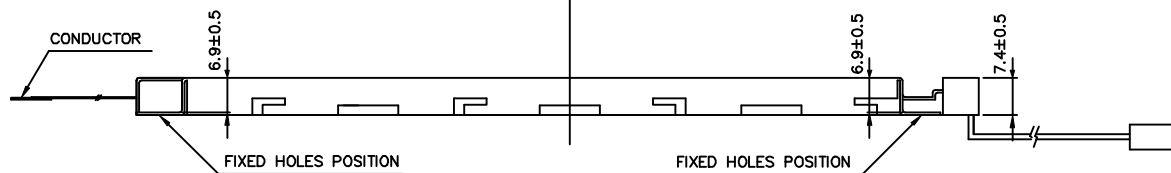

NOTE :

1. RESOLUTION : 320 X 240 DOTS
2. CONTROLLER : EXCLUDED
3. DC/DC CONVERTER : EXCLUDED
4. ⊕ INTERFACE CONNECTOR
FFC, N16 P1.0mm
⊙ CCFT CONNECTOR
M63M83-04(MITSUMI)
5. TOLERANCE NO SPECIFIED : ±0.5mm

產品編號	LTBHB_203_1K		南亞塑膠工業股份有限公司	
	NAME	DATE	NAN YA PLASTICS CORPORATION	
APPROVE			TITLE	製品圖
CHECK			DWG-NO	TBAT203G1K Rev.A
DESIGN				
DRAW	MAY PING	88.03.11	THIRD ANGLE PROJECT	UNIT : mm SCALE : 1/1