


INTERFACE CONNECTION(CN1)

Pin No.	Symbol	Function
1	CL2	Data Shift Clock Signal
2	CL1	Data Latch Signal
3	FLM	First Line Marker
4	M	Alternate Signal
5	D0	Display Data
6	D1	
7	D2	
8	D3	
9	VEE	Power Supply for LCD(+V)
10	VDD	Power Supply for Logic(+)
11	VSS	Power Supply for Logic(GND,0V)
12	BLE	H:EL Enable, L:EL Disable
13	VELG	Power Supply for EL(GND,0V)
14	VEL	Power Supply for EL(+)
15	LEFT	Touch Panel Connection
16	TOP	
17	RIGHT	
18	BOT	

↑
VIEWING DIRECTION

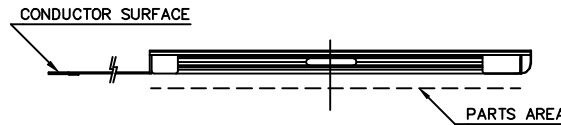

NOTE :

1. RESOLUTION : 240 X 320 DOTS
2. BACKLIGHT : EL Backlight, Blue-Green
3. TOLERANCE NO SPECIFIED : ±0.5 mm

產品編號	LTD79H202L5GK	南亞塑膠工業股份有限公司 NAN YA PLASTICS CORPORATION		
APPROVE	NAME	DATE	TITLE	製品圖
CHECK			DWG-NO	TDBH202L5GK Rev.A
DESIGN			UNIT : mm	
DRAW	MAY PING	87.12.03	SCALE : 2/3	